



SUMMER 2024



Composites Connection™

Official Newsletter of the SPE Composites Division
Reaching Over 1,000 Composites Professionals
In All Industries



Sponsored by:





BASF

We create chemistry

IDEA

**Engineering plastics and
polyurethanes by BASF for the
automotive industry**

**We turn your ideas into ideal solutions:
BASF plastics for the automotive industry.**

Shorter development times, enhanced performance, greater freedom in design. You do not want to settle for anything less than the perfect car. Neither do we. That is why we will stay by your side at every stage of your project - with our comprehensive expertise in plastics and application development, individual parts testing, consultancy in design, simulation and much more - available to you around the world. When your idea turns into the ideal car, it's because at BASF, we create chemistry.

www.performance-materials.basf.com



Chairman's Message:

Oleksandr G. Kravchenko, Ph.D.



Dear Composite Division Members,

I hope this letter finds you well and thriving in your endeavors within the fascinating world of composite materials. As we move forward into the year, there are several exciting updates and announcements I am excited to share with you.

Firstly, please join me in extending heartfelt congratulations to Dr. Srikanth Pilla from the University of Delaware, our newly awarded SPE Composites Division Fellow. Dr. Pilla's outstanding contributions to transitional research work, his dedication to fostering industrial-academic collaborations, and his remarkable mentorship of the next generation of composites researchers truly exemplify excellence in our field.

Moreover, as part of our commitment to nurturing emerging talent, I want to emphasize the upcoming deadline for student scholarships supported by SPE CD. These scholarships aim to recognize and support the achievements of undergraduate and graduate students who exhibit exceptional promise in the realm of composite materials development.

Our division continues to thrive as a diverse community of professionals from all corners of the globe. In this newsletter, you'll find a snapshot of our membership, showcasing our wide-reaching presence and collaborative spirit. I encourage each of you to continue fostering this inclusive

environment by inviting colleagues, clients, and friends involved in the composites industry to join SPE and the Composites Division.

Looking ahead, mark your calendars for the Automotive Composites Conference and Exposition (ACCE) where we'll delve into the latest trends and advancements in polymer composites research, with a focus on automotive applications. This year's event boasts a broad range of technical sessions, including exciting new areas such as AI and machine learning. We're also glad to announce the new format for the student poster competition at ACCE, providing a platform for students at all levels to showcase their innovative composites technologies. I encourage our student members to seize this opportunity to share their work and engage with industry experts.

Lastly, I want to highlight a notable study presented at last year's ACCE, which explored the intricate dynamics of abrasive waterjet cutting in fiber-reinforced composites for ensuring accurate mechanical testing—a topic of critical relevance in our field.

As we continue to push the boundaries of innovation and collaboration, I look forward to the exciting developments and discoveries that lie ahead.

Warm regards,
Alex Kravchenko, PhD
Chair, Composites Division,
Society of Plastics Engineers

SPONSOR LINKS





carbon
conversions

closing the loop - today and tomorrow

The Evolution of Recycled Carbon Fibers



introducing

the **re-Evo**® brand of products
Including our chopped carbon fiber
and non-woven advanced materials.

Find out more at CarbonConversions.com • 843-374-5600



Membership Report



By: John P. Busel, F.ACI, HoF.ACMA



Snapshot of the Composites Division Membership

As of April 2024, the SPE Composites Division has 385 members. The chart below shows the distribution of the SPE member categories. The largest group is Professional Members (242) followed by Young Professional Members (64).

The Composites Division members come from all over the world. In the chart below, there are 308 members from the United States, 30 from Canada, and 47 from the rest of the world. In the United States, members come from 38 states. The states with 10 or more members, from largest to smallest are from Michigan, Ohio, Texas, Georgia, Pennsylvania, Massachusetts, California, Minnesota, Connecticut, Indiana, Wisconsin, and Tennessee. In Canada, members come from 4 provinces with the most coming from Ontario and Quebec respectively. For the rest of the world, members come from 21 countries from most to the least are from India, Australia,

France, Germany, Netherlands, Japan, South Korea, Belgium, Columbia, Israel, Austria, Brazil, Ireland, Italy, Luxembourg, Mexico, Pakistan, Sweden, Thailand, Trinidad and Tobago, and United Arab Emirates.

The Composites Division Board of Directors asks all members to encourage your colleagues, clients, and friends involved in the composites industry to join SPE and the Composites Division. For SPE membership information, see www.4spe.org.

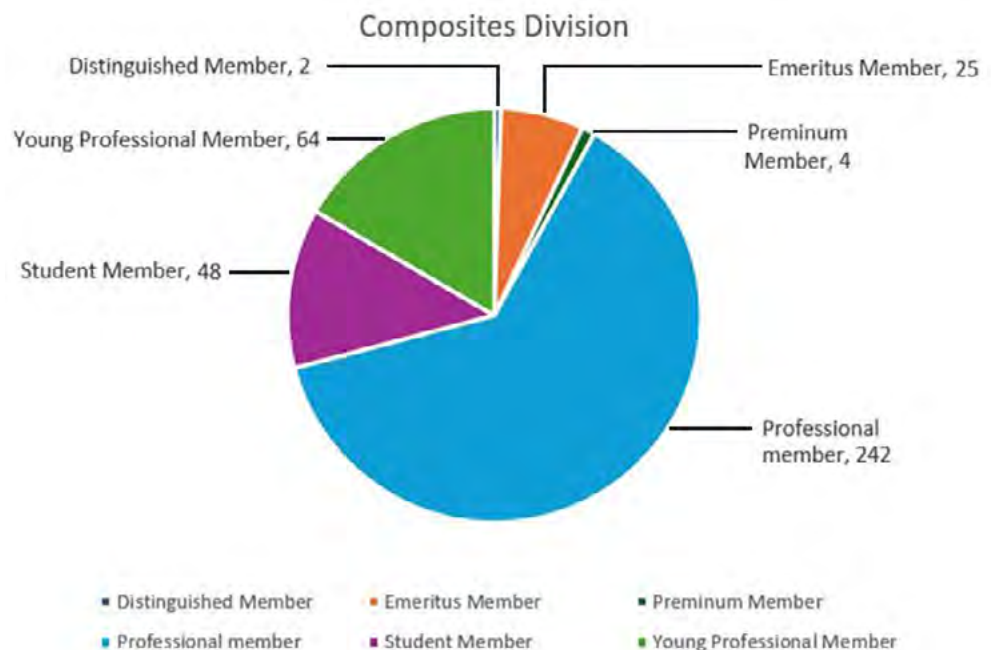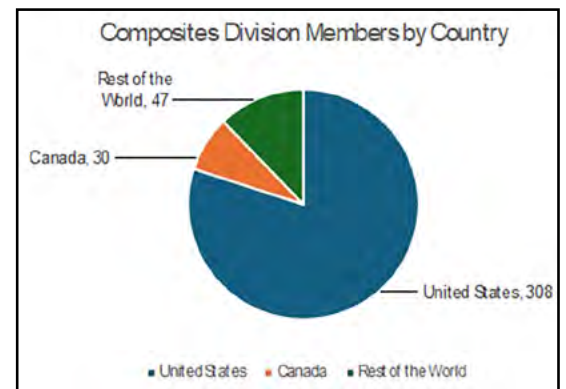

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings





Westlake

Powering a new level of mobility


Innovative material solutions from Westlake Epoxy for battery enclosures, e-motors, H2 tanks and chassis components reduce safety risk while improving power density and driving range. Our expertise in rapid processing is moving mobility forward.

westlakeepoxy.com

Welcome Vipin to the SPE Board

SPE Composites Board would like to welcome Vipin to the Composites SPE Board of Directors

Dr. Vipin Kumar is an R&D Staff Scientist at Oak Ridge National Laboratory. Dr. Kumar's current research area includes developing new composite manufacturing techniques using large-scale polymer additive manufacturing (AM) and traditional & advanced manufacturing processes. He received his Ph.D. from the University of Tokyo, Japan (Department of Aeronautics & Astronautics) in 2016. He received a prestigious Japanese Government scholarship (MEXT) during his full Ph.D. Course. He also has expertise in the CFRP composites' response to direct lightning

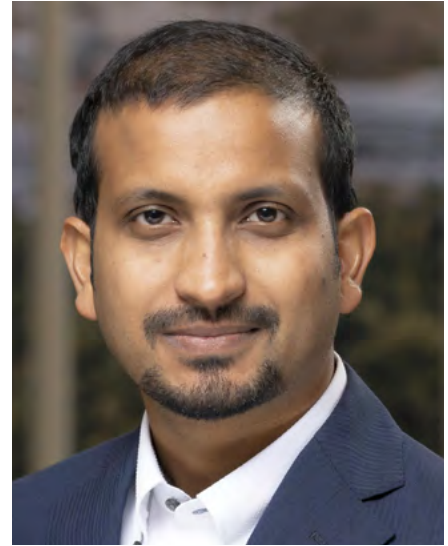

strikes and is engaged in designing novel materials to mitigate lightning strike damage. He has published over 90 papers in reputed Journals and peer-reviewed conferences and has 4 awarded and 10 pending patents under his name. He is a winner of the 2023 R&D 100 award, a finalist for the 2022 R&D 100 award, and a winner of the CAMX-combined strength award 2022. He also won the SME 2022 Outstanding Young Manufacturing Engineer and SAMPE 2021 Young Professionals Emerging Leadership Awards.

MICHELMAN
Hydrosize®
Fiber Sizings for Composites

ENHANCING COMPOSITE
PERFORMANCE THROUGH
OPTIMIZED FIBER-POLYMER
INTERFACE ADHESION

michelman.com



THE FUTURE OF TRANSPORTATION-MOBILITY AND BEYOND!

24TH ANNUAL



AUTOMOTIVE COMPOSITES CONFERENCE & EXHIBITION

Novi, MI • September 4-6, 2024

Presented by SPE Automotive and Composites Divisions

WORLD'S LEADING AUTOMOTIVE COMPOSITES FORUM

LIGHTWEIGHT - STRUCTURALLY SOUND - DESIGN FREEDOM - SUSTAINABILITY

CALL FOR PAPERS, SPONSORS & EXHIBITORS

POLYMER COMPOSITES are advancing all forms of transportation today and into the future.

Design flexibility, lightweight, structural and other inherent benefits of composites make it the premier material for EV and all mobility applications.

THANK YOU TO OUR 2023 ACCE EVENT SPONSORS:

FEATURED SPONSOR & EXHIBITOR



LUNCH SPONSOR



COFFEE BREAK SPONSOR



PREMIER PLUS SPONSORS & EXHIBITORS



ASSOCIATE SPONSORS & EXHIBITORS



TABLE TOP SPONSORS & EXHIBITORS



ADVERTISING SPONSOR

MEDIA / ASSOCIATION SPONSORS



PRESENT YOUR TECHNOLOGIES

that are advancing the industry at the ACCE 2024 event. Topics include: Composites in Electric Vehicles; Advances in Thermoplastic Composites; Advances in Thermoset Composites; Additive Manufacturing & 3D Printing; Enabling Technologies; Sustainable Composites; Bonding, Joining & Finishing; Carbon Composites & Reinforcements; AI (Artificial Intelligence), ML (Machine Learning) and Data-Driven Solutions; and Design, Modeling and Simulation of Composites.

Those interested in presenting are encouraged to send Titles and/or Topics ASAP to intuitgroup@gmail.com. **ABSTRACTS** are due **April 26, 2024** and **FINAL PAPERS AND/OR PRESENTATIONS** are due **June 28, 2024**.

SPONSORSHIP & EXHIBIT OPTIONS

offer companies the opportunity to support the event and promote their products and services to a very targeted and interested OEM audience. Contact Teri at intuitgroup@gmail.com or **248.701.8003** and see our website <https://speautomotive.com/acce-conference/> for more information.

ENABLED BY COMPOSITES

1st Key Note Announced for ACCE 2024



The executive planning committee for the SPE® Automotive Composites Conference & Expo (ACCE) is announcing the first keynote speaker for their ACCE 2024 event Sept. 4 – 6, 2024 at the Suburban Collection Showplace in Novi, Michigan (Detroit suburb). Andrew N. Hrymak, Co-Director of the Fraunhofer Innovation Platform for Composites Research at Western University and Professor of Chemical and Biochemical Engineering, will present “High Performance Composites: Trends and Impact on Automotive Lightweighting.” The presentation will showcase some of the significant automotive high performance composite developments of the last decade as well as emerging composite technologies that will have a major impact in future vehicle architectures. “A key enabling solution to the societal need for sustainability and reducing carbon footprint is vehicle lightweighting through composite structures,” said Hrymak. “Over the last decade, the composites industry has made major strides in advancing new material systems and processing techniques to produce lightweight vehicle structures at high volume automotive production rates,” continued Hrymak. “Emerging composite technologies will continue the advancement of sustainable automotive vehicle design and manufacturing into the future,” added Hrymak.



Andrew N. Hrymak

Andrew N. Hrymak is Co-Director of the Fraunhofer Innovation Platform for Composites Research at Western University and Professor of Chemical and Biochemical Engineering. His research interests include modeling, design, and optimization of materials processing systems and polymer composites. He previously served as Provost and Vice-President (Academic), Dean of the Faculty of Engineering, Associate Editor of Computers and Chemical Engineering, and Editor-in-Chief of International Polymer Processing. He has published more than 140 peer reviewed articles and 50 peer reviewed conference papers and book chapters.

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Sponsor the Newsletter

The best advertising value in the Composites Industry

- Support your SPE Composites Division
- Reach 1,000 Composites Professionals 3 Times a year via the E-Newsletter
- Maximize your exposure to the customers & the trade



Contact Teri Chouinard CBC, APR for more info intuitgroup@gmail.com
See page 18 for more details

Composite Technology for Tomorrow's Automotive and Mobility designs

Lightweight | Durable | Environmentally Friendly



Scan code to contact us about
our composite materials.

Call for Abstracts SPE ACCE

Call for Abstracts for SPE ACCE Student Poster Competition

Sponsored by Dassault Systèmes
ABSTRACTS DUE JULY 1, 2024
TROY (DETROIT), MICH.

The organizing committee for the SPE® Automotive Composites Conference & Expo (ACCE) invites graduate, undergraduate, community college, and high school students to submit abstracts on innovative composites technologies, for automotive and ground transportation, for its annual student poster competition. The competition will be held during the ACCE at the Suburban Collection Showplace in Novi, Michigan (Detroit suburb) Sept. 4 - 6, 2024. Judges who are industry experts, SPE board members, and members of the media will review all posters with student authors during the conference. Students entering the poster competition will also give a 5-minute mini-talk podium presentation on their poster topic in a special technical session. First-, second-, and third-place awards will be presented to winners in graduate, undergraduate and high school categories during a special ceremony during the ACCE.

Poster Titles and Abstracts are due by July 1, 2024. Digital copies of posters are due by August 20, 2024 for pre-review by judges. Abstracts and Digital Copies of the posters need to be submitted online via the SUBMIT 2024 PAPERS, PRESENTATIONS AND POSTERS HERE button on <https://speautomotive.com/acce-conference/>. Questions should be sent to Douglas_E_Smith@baylor.edu.

Students will need to bring 24" x 36" printed copies of their posters to the conference. Large multiposter panels and push pins for displaying the posters in the Student Poster Display area will be provided. All students presenting a poster in the competition will receive free registration to the conference, and a shared hotel room provided by SPE ACCE. Students who submit abstracts and posters early, will be provided with accommodations at the Hyatt Place hotel onsite at ACCE. The ACCE provides students with excellent networking opportunities especially ideal for those close to graduating who are starting to look for a job. The poster template is on the SPE ACCE website "2024 ACCE POSTER COMPETITION TEMPLATE" <https://speautomotive.com/acce-conference/>.

Poster topics may include, but are not limited to, subjects such as:

- Automotive Composites
- Composites and lightweight materials for trucks
- Bio-composites
- Nanocomposites
- Glass, carbon, and hybrid fibers
- Thermoset and thermoplastic technologies
- Recycling and green technologies
- Multi-materials
- Joining technologies
- Applications of Composites in Electric Vehicles

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings

continued on page 12...

Call for Abstracts SPE ACCE continued...



- Modeling and analysis of lightweight materials
- CAFE standards and mandates
- Cost-effective manufacturing
- Use of advanced materials in innovative applications
- Virtual prototyping and design
- Microstructure, failure and fracture
- Failure envelopes and theories
- Additive manufacturing of composites
- Air Mobility

Students and their posters are ranked using the following criteria:

- Content (student and poster demonstrate clarity of topic, objectives, and background);
- Motivation for research and technical relevance to conference theme;
- Methodology and approach to problem;
- Quality of proposed research results/findings;
- Conclusions are supported by information presented;
- Presentation (display aesthetics are pleasing and there is a logical flow between sections);
- Knowledgeable (presenter has a good grasp of the subject);
- Understandability (poster is effective even without student being present to explain it); and
- Overall rank vs. other posters and presenters.

High Resolution Photos from the ACCE are available via:

<https://www.flickr.com/photos/speautomotive/albums/with/72157673717033072>



2023 ACCE Student Poster Competition first place winner in the Graduate Category – Amit M. Deshpande, University of Delaware, for his poster “Manufacturing and Validation of a Carbon Fiber Reinforced Thermoplastic Composite Door” receiving his award from Keith Nagara, Dassault Systèmes, ACCE Student Poster Competition Sponsor



Keith Nagara, Dassault Systèmes (Student Poster Competition Sponsor) Presenting Award to Johnathan Behr, Clemson University, First Place Winner In the Undergraduate Category

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Award Report

By: Pritesh Yeole, Ph.D.



Part of the mandate of the Society of Plastics Engineers – Composites Division is to recognize excellence in composite materials development and proliferation. Several awards have been organized for this purpose to honor and recognize such individuals, both on academic and industrial levels. Every year the Composites Division issues these awards are based on rigorous competitions through solicitation of nominees and applicants. The awards are a) Harold Giles Award, b) Jackie Rehkopf Scholarship, c) Travel Award, and d) Educator of the Year Award. Other non-financial awards are a) Honored Service Member / SPE Fellow and b) Composite Division Person of the Year Award. These two awards aim to recognize distinguished contributions from dedicated members of the society.

Harold Giles Scholarships

This award was created in honor of the late Harold Giles who was taken from this world too soon. Harold was one of the best Composite Division Awards Chairs that many of us worked with during his days at Azdel and at UNC. He would have been thrilled to know that we are honoring his name in awarding worthy students. This award is run through SPE International in their Foundation Program series. The Composites Division will select the winners from the pool of applicants in two categories, Graduate and Undergraduate students. This year, we received 45 applications (27 Graduate and 18 Undergraduate students). The award is dispensed through SPE International to the winners.

The scoring criterion is based on twenty points for the category of scholastic achievements, community service, and other honors, up to ten points based on the strength of the recommendation letters, ten points for previous employment history particularly if this involved composite activity, up to five points for filling out the application form correctly and using good English, five points for providing their transcript and for getting good grades, and a final five points for the reason they applied for the scholarship.

Award Requirements:

- Two awards presented to one undergraduate and one graduate student, who will maintain the academic status for at least two semesters after award announcement.
- An essay documenting experience in the composites industry is required (courses taken, research conducted, or jobs held)
- Have not received the award in previous years.
- Winners are typically students who not only maintained a good grade point average but also served their community, had some experience in the composite area, and are backed by solid reference letters from former professors and employers

The award can be up to \$3500 per student depending on funding availability.

Key Dates:

Issue call for nominations February 1st
Close call for nominations April 1st
Complete award adjudication June 30th
Notify recipients by July 30th
Present awards SPE ACCE

continued on page 14...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Award Report continued...



Dr. Jackie Rehkopf Memorial Scholarships

This award is in honor of the late Jackie Rehkopf who was a recognized engineer who published books and was actively involved in the composites industry. The Automotive and Composites Divisions co-sponsor these awards and therefore co-coordinate. This award is presented annually at the SPE ACCE conference each fall and is a premiere award for exemplary performance.

Award Requirements

- A single full time grad student or two undergrad students if no grad students qualify
- Preference will be given to female students, but the best candidates will be selected
- Focus should be on research activities targeted to ground transportation composite technology
- Students must be in good academic standing and pursuing a degree in Polymer Science, Composites, Plastics, or a related Engineering discipline
- A 2-page essay is required showing planned work and how it will benefit composites in an automotive or other ground transportation application
- A letter of recommendation from the student's advisor or mentor is also required
- Scholarship recipients are required to present work at an SPE technical conference and/or have it published in an SPE technical journal

continued on page 15...

BYK Performance Additives

Maximizing Thermoplastics through process and product enhancement.

www.byk.com

A member of  **ALTANA**

 **BYK**

Ask.BYK.USA@altana.com

Award Report continued...



The award can be up to \$5000 if one student is selected or up to \$2500 per student if two are selected, depending on funding availability.

Key Dates

Issue call for nominations January 1st
Close call for nominations April 1st
Complete award adjudication June 30th
Notify recipients by July 30th
Present awards SPE ACCE

Travel Award:

This is a two-year award where the applicant fills out an abstract form the first year and returns the second year to present a paper/poster to discuss how the topic has progressed. This reward is presented at ANTEC during the business meeting. Typically, scoring has been based on English, the novelty of the concept, and the strength of the research plan. This is a \$2000 award, dispensed in two instalment payments over 2 years. This award is sponsored by industry partners every year. If any company like to sponsor this award, please reach out to the Awards Chair Dr. Pritesh Yeole (priteshyeole.mse@gmail.com).

Award Requirements

- A two-part award presented annually to an undergraduate or graduate student.
- At the time of application, master's students must be in the first year of their program and doctoral students must be in the first two years of their program
- The winner is selected based on a 250-word abstract describing their composites research
- In the first year, the recipient receives a \$1000 (USD) scholarship award and a plaque, presented at ANTEC
- To be eligible for the second \$1000 installment, the research described in the winning abstract must be presented in a paper at ANTEC the following year

Educator of the Year Award:

The Educator of the Year Awards is an industry sponsored award. A certificate/plaque combination will be presented at ANTEC during the business meeting. The present score sheet provides scoring of up to ten points for English at 1X, ten points for recommendation letters at 2X strength, and student support examples at 3X strength. This prestigious recognition is aimed to honor an Educator who have influenced his students to excel in the composite field and grow their composites careers.

Award Requirements

- Someone in the educational field (high school, university, or college-level)
- Has made a significant contribution to the training of students in the composites area. E.G.:
 - o the creation of new educational programs
 - o the development of new pedagogical tools
 - o motivating students to enter the composites sector
- Selection will be based on contributions made during the previous year.
- Must submit a nomination form and two letters of support

The award is \$2500, covered by an industry sponsor. If any company like to sponsor this award, please reach out to the Awards Chair Dr. Pritesh Yeole (priteshyeole.mse@gmail.com).

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper

Influence of Waterjet Cut Quality for Fabrication of Test Specimen on Mechanical Testing Results

Jacob Montrose & Garam Kim
School of Aviation and Transportation Technology,
Purdue University West Lafayette, Indiana/
United States of America 47906

Harry K. Lee
Composites Manufacturing and Simulation Center (CMSC),
Purdue University West Lafayette, Indiana/
United States of America 47906

Abstract

An abrasive waterjet is an effective method of cutting fiber-reinforced composites as it allows for high accuracy cuts without introducing thermal effects or physical contact with a machining tool. In the machining of fiber reinforced composites for research purposes, the fabrication of accurate and undamaged test specimens is crucial for testing mechanical and physical properties. The cutting edge of the test specimen can be varied based on primarily the cutting speed of the abrasive waterjet. The quality of the cutting edges can have a significant impact on the test results since stress concentrations can form in those defects. In addition, the abrasive waterjet leaves what is known as a kerf angle. A kerf angle is formed because of the inherent physics of the cutting process. Throughout this study, the kerf angle was primarily evaluated with carbon fiber reinforced composite samples with varying cutting speeds and different thicknesses. Fiber reinforced composite test specimens were then fabricated with an abrasive waterjet to test the effect of the edge surface finish and its effect on the mechanical properties. A tensile test was conducted with the composite test samples that were cut at various speeds. A Digital Image Correlation (DIC) camera was used to track the local strain change throughout the duration



Jacob Montrose receiving Honorable Mention Award

of the test to investigate any stress concentrations which were formed. The kerf angle data along with the cutting speeds effect of the selected composite's mechanical properties was analyzed and presented to address importance of using proper abrasive waterjet cutting parameters for fabricating composite test specimens.

Introduction

The composition of fiber reinforced composites includes a combination of fiber strands surrounded by a polymer matrix. The reinforcement fibers' purpose is to provide the structural stability of the composite and is responsible for withstanding the required load for each specific application. The polymer matrix is critical for bonding the reinforcement fibers and distributing the load throughout the entire part [1]. Fiber reinforced composites are becoming more and more common because of their

continued on page 17...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...



high strength aspect ratio while also being lighter than other common aerospace materials like steel and aluminum [2]. Based on previous research, depending on the type of fiber reinforced composite, general composites weigh as much as 51% less than an equivalent thickness steel part [3]. With a higher strength to weight ratio, fiber-reinforced composites are an optimal material for applications that require a lighter material yet still require the ability to carry high mechanical loads.

The emergence of fiber reinforced composite parts and structures have increased over the past decades in various industries. Specifically, the aviation and aerospace industries have shown tremendous growth in composite structures [4]. One example of the growth of the composite

industry within aviation includes the Boeing 787 Dreamliner. In 2009, the 787 took its first maiden flight, which was the first time a plane that was manufactured with more than 80% composites took to the skies for commercial use [5]. In the 1970s, the Concorde utilized fiber reinforced composites, but it was only made up of about 7% of the total aircraft [6]. In addition to the aviation industry, aerospace companies have also started to heavily rely on fiber reinforced composites. In 2020, the overall aerospace composite market reached \$10 billion in value [7]. As a result, in the ever-growing expansion of the composite industry, the emergence of composite parts and structures has pushed for further research into their mechanical and physical properties.

continued on page 18...

DSC CONSUMABLES i n c o r p o r a t e d



High Quality • Lab Ready
DSC Sample Pans



ACCE Award Winning Paper continued...



The fabrication and manufacturing process of fiber reinforced composites can sometimes be quite challenging. Conventional manufacturing methods of composites are obstacles for manufacturers because of the heterogeneous complex of fiber reinforced composites [8]. Often, when a composite part is machined using a CNC machine, it is very common for the fibers to be pulled out of the part with the rotation of the tool. With the pulling of the fibers, the composite inevitably loses a substantial amount of strength. This phenomenon is what is known as fiber pullout. The fibers are separated from the rest of the part, thereby affecting the overall mechanical properties. Another major problem that is induced by conventional cutting methods in compos-

ites is delamination. Delamination occurs when the laminate plies are separated from each other during the high-speed cutting process [10]. The torque of the machining tool causes delamination within the composite part therefore weakening the parts mechanical properties. For further evidence of how common delamination occurs in conventional composite cutting methods, a study has concluded that there is a 50% chance of delamination when the cutting feed rate is above 600 mm/rev [11]. Since the conventional fabrication methods for composites have shown inherent problems, there is a need for further research into unconventional fabrication methods and their effect on the composite's mechanical properties.

continued on page 19...

Sponsor the Newsletter

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Quarter page ad or logo ad:
3.75" x 5"\$500

Half page ad:
7.5" x 5.5", 5" x 7.5", 4" x 8.5"\$750

Full page ad:
7" x 10", 8.5" x 11"\$1,250

Contact: Teri Chouinard CBC, APR
SPE Composites Division
Sponsorship Chair
C/O Intuit Group, Inc.
phone 248.701.8003
intuitgroup@gmail.com



Please provide Logos as JPG and EPS files (send both if possible)
Please provide Ads as High Resolution PDF files
Advertising with the SPE Composites Division is inexpensive and easy. Please help us to promote the benefits of Composites in Industry.

Sponsoring the Newsletter enables the SPE to communicate the benefits of the composites in many industries, which fortifies your marketing efforts.

- Support your SPE Composites Division
- Reach 1,000 Composites Professionals 3 Times a year via the E-Newsletter
- Also reach 1,070 SPE Composites Division Linked In Members 3 times a year and an additional 11,492 COMPOSITES Linked In Members Secondary group where the link to the newsletter is posted year-round
- Reach many more as a sponsorship also includes your logo on our website, www.composites.4speorg with a link to your company
- Maximize your exposure to the customers & the trade
- Stay informed on the latest composites activity

Increase your presence on the web leading to more sales by sponsoring our Electronic Newsletter which is published on the SPE Composites Division Website and emailed to all Division Members (1,000 approx.) 3 times annually. Rates include 3 issues (not on calendar basis - published approx. Nov/Dec, Mar/April, July/August). All ads include a link to your website increasing your exposure on the worldwide web exponentially. Sponsorship also includes your logo ad with a link to your website on www.composites.4speorg further increasing your presence on the Web as a Leader in Composites Technology.

TAFNEX™

CF - PP UD Tape



Carbon
meets
Polypropylen



TAFNEX™ CF - PP UD

is an unidirectional thermoplastic tape
consists of carbon fiber and polypropylene.

- Very good water resistance
- High stiffness and strength at low density
- Unique fiber bonding technology by Mitsui Chemicals
- Excellent processability in thermoforming, tube winding, tape placement or backinjection molding

ACCE Paper continued...

One unconventional method of machining composite materials is by using a laser. Laser cutting is a considerably new, innovative way for composites to be accurately cut. By using an intense directional monochromatic light beam, lasers can penetrate the composite at varying thicknesses by adjusting the frequency of the light [18]. As previously mentioned, tool contact with the composite results in a high likelihood of defects intrinsic in the part. Like most all unconventional methods of cutting composites, laser cutting does not use a tool on the part itself which avoids common defects formed in conventional methods. On the other hand, there are many disadvantages that are associated with laser cutting because of its inherent thermal nature [19]. Due to the physical properties of composites, there have been studies showing the laser beam melting or destroying the fibers and matrix in an unwanted way. Delamination and epoxy recession are two of the side effects that are attributed with laser cutting of composite materials. The industries who utilize unconventional methods of composite cutting have reportedly struggled with finding a way around the defects formed during the manufacturing process [20].

Waterjet cutting is another unconventional method of fabricating and manufacturing composite parts, materials, and samples. A waterjet encompasses many advantages compared to other methods of cutting composites. Abrasive waterjets utilize a combination of high-pressure water streams and garnet abrasives [11]. The high-pressure water is streamlined through the jewel orifice and is then mixed with the garnet abrasives inside of the mixing chamber as shown in Figure 1. Once the abrasives have been mixed with the abrasives, the mixture undergoes a narrowing in

continued on page 20...

ACCE Award Winning Paper continued...

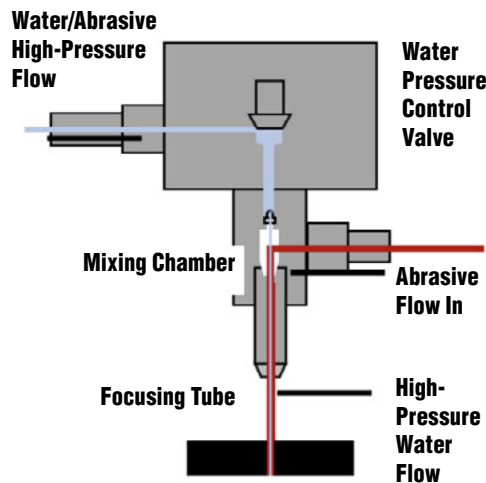


Figure 1. Schematic drawing of the abrasive waterjet.

the focusing tube which utilizes the Bernoulli principle [12]. By narrowing the tube, the pressure is increased even further to provide a more focused, penetrative force into the composite material.

That penetrative force that is created during the waterjet process has many advantages in the cutting of the composite material. No direct tool contact is one of the most important advantages that a waterjet has over conventional composite machining methods [13]. Without direct tool contact, the waterjet avoids heating the composite material to a temperature that could alter its mechanical properties. If the fiber reinforced composite is heated up during the machining process, the thermal conductivity of the part will result in an unwanted amount of resin degradation [14]. Based on a previous study, once the part has been heated to its glass-transition temperature, the mechanical properties of the composite part have been drastically changed. As a result, both tensile and shear strength are reduced by at least 30% in each of the test

specimen groups which were separated by ply orientation. Since the abrasive waterjet does not use a machining tool or bit, another major advantage of the waterjet emerges. During the cutting process of an abrasive waterjet, there is no tool wear which keeps the operating costs extremely low making it very popular for industry. Furthermore, when a computerized numerical control (CNC) machine is used to cut composite materials, there is a high wear factor on the machining tool [16]. This is not only economically inefficient, but if there are multiple composite parts that need to be manufactured, there is a chance that each part would have a different edge cut finish due to the tool wearing down [17]. An abrasive waterjet does not experience tool wear when cutting which allows for a more repeatable cut on each part. The cut may be repeatable without the tool wear, but the waterjet cutting quality is significantly lower than when using a CNC.

Even though waterjets possess many advantages, there are also some disadvantages. One of the most common disadvantages of using a waterjet to cut composites is the edge cut quality that is produced because of the cutting process. Edge cut quality refers to the roughness that is produced from the high-pressure water and garnet stream as shown in Figure 2. The differences in edge cut qualities is a result of the cutting speed, the thickness of the material, and the hardness value associated with each material. If the waterjet cutting process is slowed down to achieve a smoother finish, then the amount of time to manufacture the part will rise significantly [21]. For those in composite industries, even though an abrasive waterjet is an effective way of fabricating parts, the manufacturing time has been one setback compared to conventional methods

continued on page 21...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings

ACCE Award Winning Paper continued...



Figure 2. 100% - 20% cutting speeds and the resulting edge surface finish.

of cutting composites. Not only is the machining time increased, but the amount of abrasive also becomes quite costly as the waterjet uses a constant flow rate of abrasive throughout the entire cutting process.

Another disadvantage of waterjet cutting is the possibility of blowback. Steel slats are used inside of the waterjet to provide support for the composite structures for the machining processes. Blowback occurs when the cutting stream crosses over those steel slats and rebounds the abrasive back onto the reverse side of the part. This defect impacts the overall finish of the composite part, but if the part is a key structural component, the mechanical properties may also be altered. In addition to blowback, delamination is another defect that is produced during the machining process [22]. Due to the multi-layer fabrication of fiber reinforced composites, delamination is quite prevalent when cutting composites with an abrasive waterjet. Delamination is a common problem with an abrasive waterjet because when the waterjet begins its cutting operation, the pierce point causes an initial crack on the top layer due to the immediate ultra-focused high pressure exerted on the part. Not only is the top layer damaged, but the mixture of the high-water pressure and the abrasives are destructive enough to spread out in between the laminates and propagates that initial crack between the layers of the crack. As a result, the crack will spread out between the

layers of the fiber reinforced composites. If the crack begins to propagate outside of the intended cutting area, then the destruction of the fibers and polymer matrix are bound to affect the mechanical properties of the specimen [22].

Lastly, arguably the most challenging disadvantage to control for precise abrasive waterjet cutting into any material is what is known as the “kerf angle” [23]. After the mixing chamber has appropriately combined the garnet abrasives with the high-pressure water stream, the number of abrasives in the centralized area on the part become scattered. When the stream cuts the part, the top of the material will experience the most localized number of abrasives compared to the bottom because the abrasives follow the channel formed during the cut. As a result, the width of the cut on the top layer are inevitably larger than the resulting width on the bottom layer as shown in Figure 3. A taper is therefore formed on the cutting edge of the part. The reduction in cross-sectional area that is resulted from the tapered cut significantly affects the parts mechanical properties. For the edge cut quality, blowback, and delamination there have been a significant amount of research and discoveries in limiting those defects. The edge cut quality can be greatly improved by simply slowing the cutting speed of the abrasive waterjet. Next, blowback can be slightly avoided by ensuring that the part that is being cut is away from

continued on page 22...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...



the steel slats within the waterjet as much as possible. If the part is too large, blowback may still occur, but if the pierce point of each cut is not directly on the composite part, then the blowback will be kept to a minimal, case depending. Kim states that by using a low-pressure cutting pressure along with an early release of the abrasives can prevent delamination between the layers of the fiber reinforced composite. Kim further states that a ramping up to high-pressure during the cutting process from the low-pressure piercing does not result in interlaminar delamination [26]. As mentioned, edge cut quality, blowback, and delamination of abrasive waterjet cutting has been extensively researched in the past.

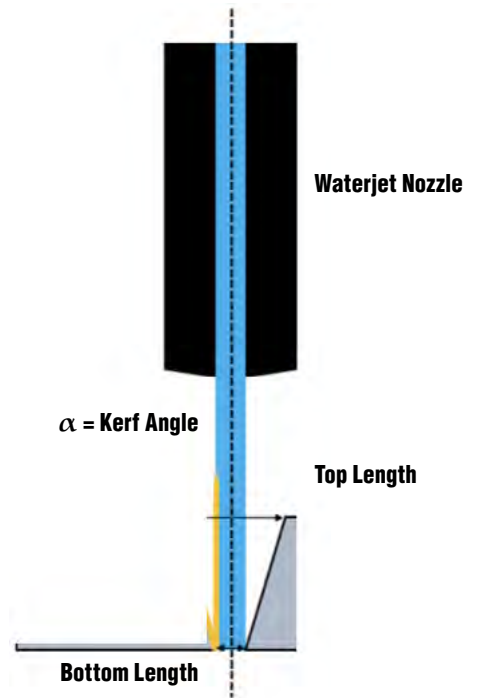


Figure 4: The mechanically recycled CF-PEKK and the fiber length distribution.

The kerf angle on the other hand has been an issue that has yet to be completely analyzed and resolved. The kerf angle occurs regardless, to different severities, of the thickness and type of material. It is one of the most challenging abrasive waterjet defects for engineers and researchers to understand and compensate for. Some companies have made efforts to reduce the effect of the kerf angle on the manufactured parts. In recent years, the advancement of the 5-axis abrasive waterjet machine along with further research into the kerf angle has resulted in a better understanding of how to compensate for the taper on machined parts. With the adjustment of the waterjet head, up to 5 degrees maximum, it is possible to angle the high-pressure water abrasive mixture into the part at an angle.

continued on page 23...

Applus⁺

DatapointLabs

Test Catalog

Expert Material Testing

Composite Testing

- Tensile
- Compressive
- Shear
- DMA
- Thermal

TestPaks[®] for CAE

- Digimat
- Altair Multiscale Designer
- LS-DYNA
- Abaqus

Validation

- CAETestBench[™]

Certificate # 1242.01
ISO/IEC 17025:2017

Administered by VDA
ACCREDITED
Certificate # 1723121670
Non Metallic Materials Testing

strengthening the materials core of manufacturing enterprises

www.datapointlabs.com | Tel: +1-807-266-0405 | Materiality support: +1-807-257-1784

ACCE Award Winning Paper continued...



	1/4"	1/2"	3/4"
100%	80.10	40.10	25.89
75%	60.08	30.08	19.42
50%	40.05	20.05	12.95
25%	20.03	10.03	6.47

Table I: Carbon fiber reinforced composite cutting speeds.

Even though the compensation for the kerf angle can be effective in some cases, the rate at which the abrasive waterjet cuts the part is still the main factor in producing the resulting taper [25]. The conclusion of Wang's paper indicates that the angle can be compensated for, but it is not effective enough to completely correct the surface profile. Since the surface profile still produces a taper on the part, the cross-sectional area is therefore altered. With current day technology advancements in abrasive waterjet cutting operations, there is still a need to investigate the effects of two major elements: kerf angle and the effect of the cutting speed on the parts' mechanical properties.

Methodology

As mentioned previously, the kerf angle is a quite difficult defect to avoid during the abrasive waterjet cutting process. There are three main factors that affect the kerf angle formed on the edge because of the abrasive waterjet cutting operation: thickness of the material, the cutting speed of the waterjet, and the hardness of the material. As a result, it was important to study these traits and how the kerf angle forms. Table I provides the recommended cutting speeds from the waterjet manufacturer in inches per minute.

Since material thickness and the cutting speed has been addressed for the carbon fiber reinforced composite samples, the remaining variable that effects the resulting kerf angle on a part is the materials' hardness. To relate the abrasive waterjet machining and the hardness of the material, a confidential equation is formulated for each waterjet manufacturing company. Based on the company's internal evaluations of common materials used throughout the industry, a machinability index is attributed to each material. This machinability index is based on the hardness of the material along with other mechanical properties including ductility and brittleness. From those observations, it was evident that the lower the machinability index, the harder the material, which inevitably confirmed the recommended cutting speeds previously mentioned for the carbon fiber reinforced composite samples. Table II provides the information of the index given for the composite laminate used in this research.

Based on the machinability index and their relation to the proposed cutting speeds of the waterjet, it was possible to continue to the abrasive waterjet cutting procedure. Once all three variables were addressed, all samples were then cut using the abrasive waterjet with the predetermined cutting parameters as previously shown. The samples were placed on a sacrificial board to prevent any movement of the samples

Composite Laminate	552.71
---------------------------	---------------

Table II: Material machinability index assigned by waterjet manufacturer.

continued on page 24...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...



during the cutting process. In addition, a laser was installed on the abrasive waterjet to ensure that the x-axis and y-axis lined up perfectly with the sample's edge. From there, the waterjet was positioned outside of the part to prevent any delamination or other defects in the cuts. The saw cut function was then used to cut 0.75" perpendicular into the sample for each cut. After each sample was cut, the samples were then cleaned with the appropriate chemical agent and potted for microscopic images. For the best microscope images, the samples were grinded with 220-, 500-, and 1200-grit. Polishing was the next step in achieving the cleanest microscopic images, so the samples were polished in a specific order. Once complete, each sample were then analyzed with a scanning microscope with 10x magnification. Since another software called ImageJ was going to be used for the measurement of the top and bottom lengths for each cut, it was imperative that a known distance was captured. To do that, a distinguishable feature for each sample was measured inside of the microscope software. Then, that known distance was able to set the scale factor inside of ImageJ. Without this procedure, theoretically each sample would have resulted in various scale factors, therefore effecting the finals measurements. Then, having set up the scale factor, the samples were then imported into ImageJ for the evaluation of the

desired measurements. An unexpected preliminary finding occurred during the investigation. Three zones were distinguished, making it important to further breakdown the kerf angle into the three respective sections shown in Figure 4. The first top zone had a curved section, the second zone was divided up based on the taper of the cut, and the final zone was a straight cut ending at the bottom of the sample. A clear representation of these three distinguishable zones found during the evaluation of the microscopic samples is shown in Figure 4.

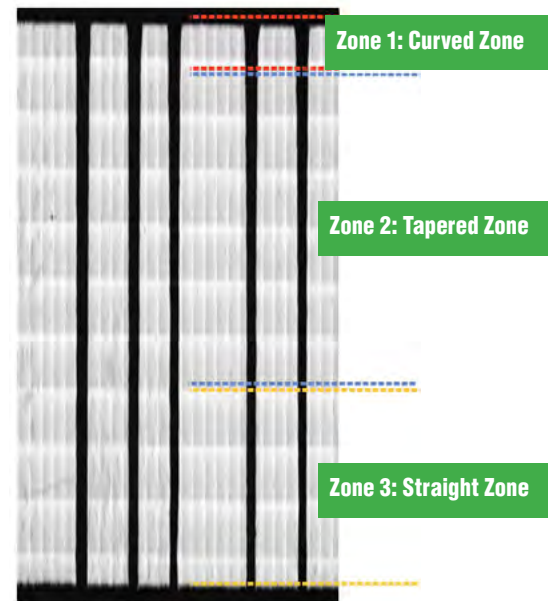


Figure 4: Three distinguishable zones delineated based on microscopic images.


continued on page 25...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...

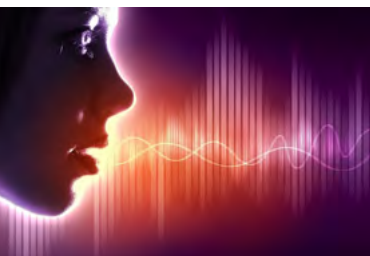

As a result of the three distinguishable zones throughout the initial observations, it was also important to study the effects of the abrasive waterjet cutting process on fiber reinforced composites mechanical properties. When machining fiber reinforced composite parts, the surface finish is crucial in maintaining the intended mechanical properties. For composite parts machined with an abrasive waterjet, the surface finish is extremely important because if there are any defects left on the part, it could possibly result in skewed, unpredictable mechanical properties. As a result, this study also investigated the impact of the edge cut quality formed on fiber reinforced composite test specimens and their mechanical properties. In this case, since an abrasive waterjet was used to machine each test specimen, different edge finishes were achieved by varying the speed of the waterjet. Varying the cutting speeds produced different edge finishes which is likely where stress concentrations could initialize and propagate when under loads. As a result, throughout this study, for each ply orientation group, three different machining speeds were used: 200 in/min, 125 in/min, and 50 in/

min. Along with varying the speed of the waterjet cutting operation, different fiber orientations were tested. Per the recommendations of ASTM 3039, two separate sample sizes were fabricated to perform tensile tests. The 0° fiber orientation sample group was manufactured to specific dimensions of 10" long, 0.5" wide, and 0.04" thick. The 90° fiber orientation sample group was manufactured to 7" long, 1" wide, and 0.08" thick. Different fiber orientations were manufactured because it was imperative to investigate the relationship between the fiber orientation, edge surface roughness, and its effect on the ultimate tensile load each sample group could withstand. Table III shows the corresponding cutting parameters for each group.

The purpose of testing both 0° and 90° ply orientations were to be able to analyze whether the reinforcement fibers or the polymer matrices were more effected by the edge cut quality. For the 0° test specimens, the reinforcement fibers of the composite were parallel to the load that was applied. It was then conceivable to investigate the effect of the roughness on the edges, fiber orientation, and the strength

continued on page 26...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings

	Cut Quality 1	Cut Quality 2	Cut Quality 3
Sample Group 1 (0°)	200 in/min	125 in/min	50 in/min
Sample Group 2 (90°)	200 in/min	125 in/min	50 in/min

Table III. Cutting Speeds for carbon fiber reinforced composite tensile testing.



ACCE Award Winning Paper continued...

of the test specimen. On the other hand, the 90° test specimens were used to determine the relationship between the edge finish and the altered state of the polymer matrix. The 90° were able to test primarily the matrix because the load that was applied to the test specimen was now perpendicular to the fiber orientation. By doing this, the polymer matrix was isolated from the reinforcement fibers and an investigation could now be done to evaluate how the stress concentrations formed.

Once the specimens for each group were fabricated with the abrasive waterjet, the ends were sanded using 200 grit sandpaper and an orbital sander. The 0° samples were sanded 2.25" on each end and on both sides. In addition, the 90° samples were sanded 1" similarly. The tabs were necessary because of the high force exerted by the 22-kip load frame shown in Figure 5. Through previous research, without the tabs, the composite samples would become distorted thereby effecting the results. To provide the most precise and secure bond, a bonding jig was designed for the desired adhesion during the 24-hour bonding process. After the specimens were inserted into the bonding jig, a steel plate was compressed onto a lower steel plate to provide equal compression. To ensure the top plate did not move during the 24-hour cure cycle, c-clamps were also placed to secure the top plate and the bottom plate. After 24 hours, the c-clamps and bonding jigs were removed apart, and the samples were pulled out.

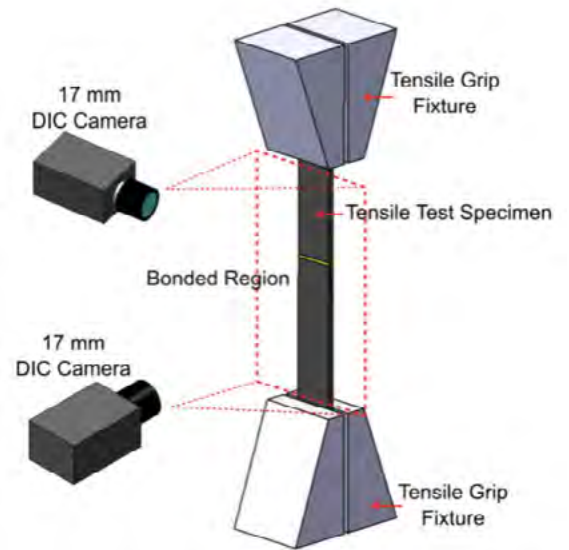


Figure 5. 22-kip load frame with two DIC cameras setup during tensile testing.

After the bonding process, the samples were spray painted so the Digital Image Correlation (DIC) camera could obtain accurate data during the tensile test. First, a white spray paint was applied to one side of all the samples. Then, a black ink roller was used to provide fine speckles to the white paint. Before testing could commence, the DIC was calibrated using a similar speckled patterned calibration tool. The rate at which the 0° samples were pulled by the 22-kip load frame was 2 mm/sec per ASTM 3039. For the 90° samples, after multiple dummy test sampling, it was determined that for the best evaluation, a pulling rate of 0.5 mm/sec was optimal. Throughout the testing of all 30 fiber-reinforced composite samples, the DIC was able to produce images every 0.5 seconds which provided the most accurate analysis possible. During the analysis process, the calibration images that were previously mentioned were used for each

continued on page 27...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings

ACCE Award Winning Paper continued...



sample to calibrate the analysis software as well. For each sample, the software was able to evaluate all the photos from the DIC which amounted to approximately 150-200 images per sample. In addition, with the data outputted by the 22-kip load frame, the software was able to determine specific mechanical properties of each sample and report an excel file for further investigation.

Carbon Fiber Reinforced Composite Kerf Angle Results

The first sample that was investigated was 1/4" thick carbon fiber reinforced composite. The 100% (blue) cutting speed shows the greatest angle along the tapered zone. Also, the 100% cutting speed took away the least amount of material but left a much more pronounced kerf angle on the sample. Next, the 75% cutting speed (red) produced a slightly smaller kerf angle

than the 100% speed, but it was still relatively tapered. The 50% cutting speed kerf angle more nearly resembled a straight cut, yet still had a slightly tapered kerf angle. Lastly, the 25% cutting speed proved to be the optimal cutting speed for the 1/4" thick carbon fiber reinforced composite sample in terms of reducing the kerf angle. Furthermore, since the top and bottom lengths are trickier to delineate from in Figure 6 (a), the top and bottom measurements were expressed in Figure 6 (b). A similar, expected trend occurred throughout the data analysis for the four cutting speeds with respect to their top and bottom lengths. As previously mentioned, the 100% cutting speed had the least amount of material removed by the abrasive waterjet. From

continued on page 28...

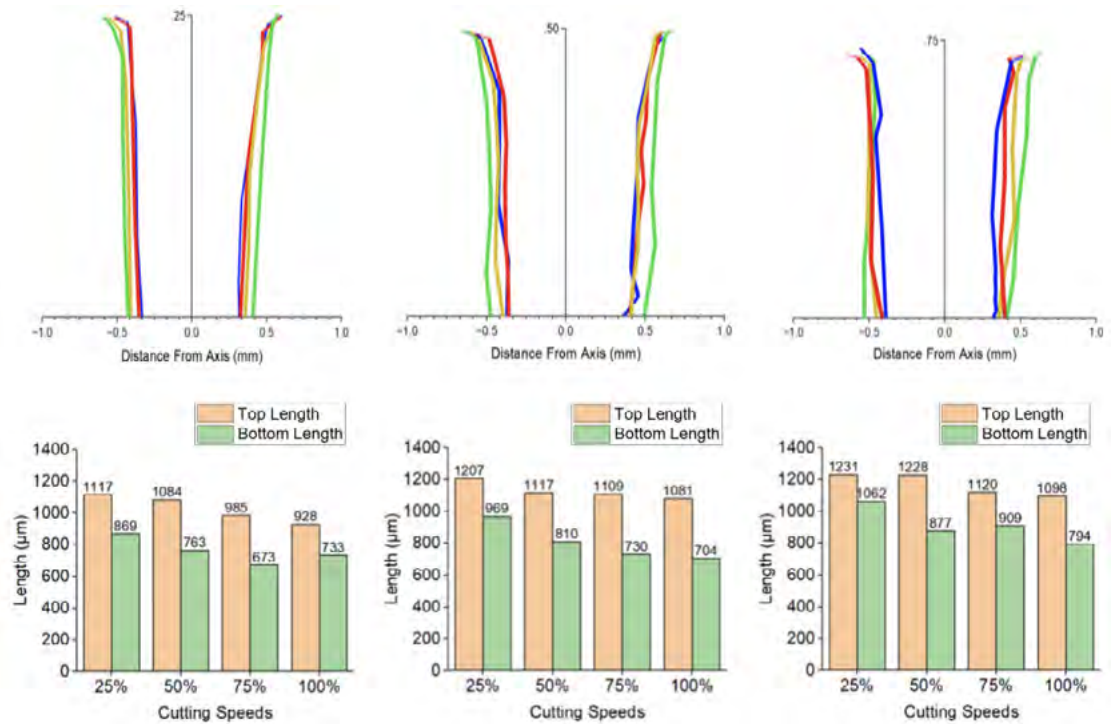


Figure 6. (a) Kerf angle projection graph. (b) Top and bottom length measurements.

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...



there, each cutting speed removed more and more material off the part. The next microscopic image that was analyzed was the 1/2" thick carbon fiber reinforced composite sample. On average, the kerf angle breakdown in Figure 6 (a) shows a similar pattern. The 100% cutting speed produced a larger kerf angle compared to the remaining three cutting speeds. Meanwhile, similar to the 1/4" thick carbon fiber reinforced composite sample, the 100% also removed the least amount of material during its cut as shown in Figure 6 (b). The 3/4" thick carbon fiber reinforced composite sample followed the same previously mentioned trend whereas the 100% cutting speed produced the largest taper, while the 25% cutting speed resulted in a cut with a smaller kerf angle.

Tensile Test Results

The carbon fiber reinforced composite samples results led to a further investigation into the impact of the kerf angle on the specimens' tensile properties. Figure 7 illustrates the maximum stress the 90-degree group could withstand. The data showed an unclear relationship between the cutting speed and the maximum stress each group could withstand.

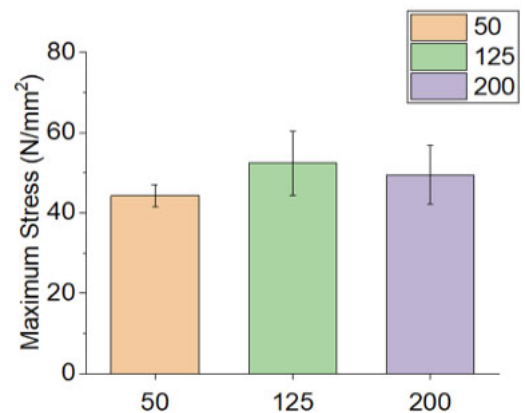


Figure 7. 90° maximum stress with the theoretical cross-sectional area.

continued on page 29...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Sponsor the Newsletter

The best advertising value in the Composites Industry

- Support your SPE Composites Division
- Reach 1,000 Composites Professionals 3 Times a year via the E-Newsletter
- Maximize your exposure to the customers & the trade



Contact Teri Chouinard CBC, APR for more info intuitgroup@gmail.com
See page 18 for more details

ACCE Award Winning Paper continued...

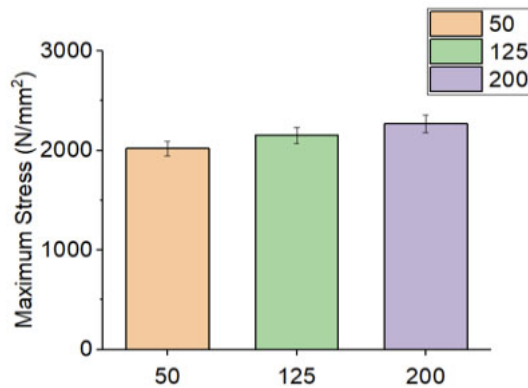


Figure 8. 0° maximum stress with the theoretical cross-sectional area.

Figure 8 shows the results for the tensile testing of the 0-degree test specimens. There is a slight increase in maximum strength as the cutting speed increases. This result is contrary to the initial hypothesis that the slower cutting speed would produce a smoother finish therefore being able to withstand more load.


Before the testing, each sample was measured using calipers to find the cross-sectional area per ASTM 3039. Based on

the results from the kerf angle studies and the maximum stress with the theoretical cross-sectional area, it is concluded that this method is not accurate enough to provide accurate measurements. Since the kerf angle is formed on the part as previously shown, the measurement device used to calculate the width of the test specimen only captures the widest point of the specimen. Figure 9 portrays the traditional and actual ways of measuring the test specimen's cross-sectional area.

To determine the correct cross-sectional area, the samples were potted, and microscopic images were obtained. Once the cross-sectional area was determined, it was then possible to input those values in for the calculation of the maximum stress for each sample group. Figure 10 shows the corrected maximum stress values. It was determined that all the 90-degree sample groups withstood relatively the same amount of maximum stress.

continued on page 30...

Theoretical Cross-Sectional Measurement

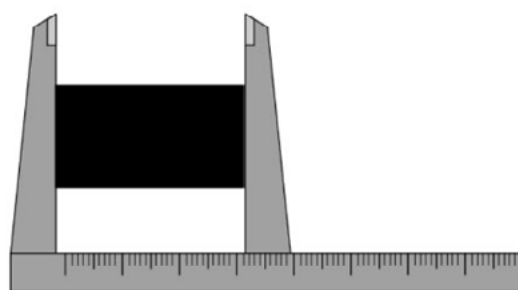

Actual Cross-Sectional Measurement

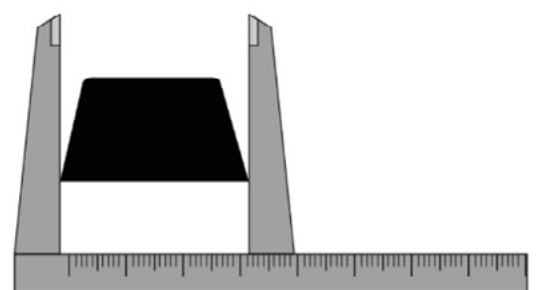


Figure 9. Theoretical vs. Actual measurement methods of samples for stress calculations using vernier calipers.

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...

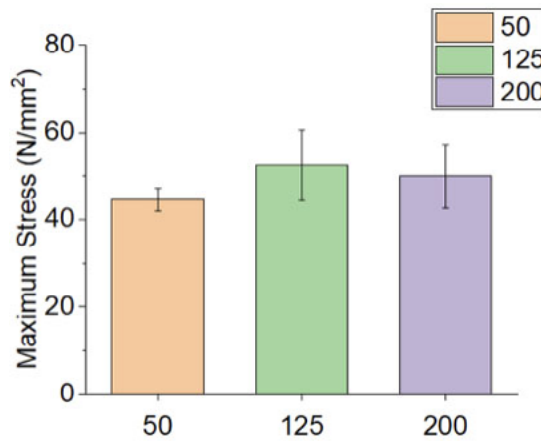


Figure 10. 90° maximum stress with the theoretical cross-sectional area.

Similarly, the 0° sample groups were approximately the same amount of stress each sample could withstand once the cross-sectional area was accounted for. Figure 11 shows the recalculated maximum stress which places importance the kerf angle factor in obtaining the correct and accurate cross-sectional area.

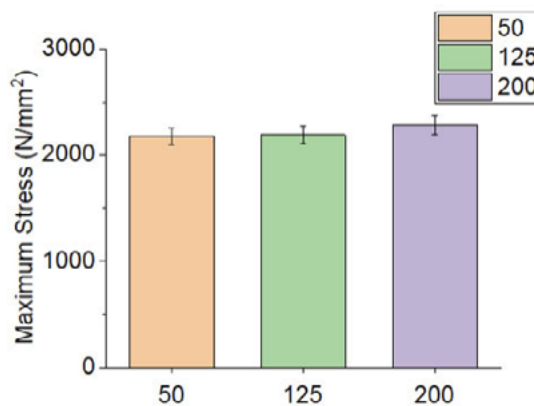


Figure 11. 0° maximum stress with the theoretical cross-sectional area.

Conclusion

Throughout the investigation of the effect of the abrasive waterjet on carbon fiber reinforced composites, many observations were made. First, when a 100% cutting speed was used, the kerf angle was the largest. From the 100% cutting speed, the kerf angle became less and less as the cutting speeds were slowed down. Additionally, the cutting speed of the abrasive waterjet produced varying kerf angle which also altered the amount of material that remained on the part. To test the mechanical properties of the composite test specimens with various edge surface finishes, sample groups were formed to perform tensile tests. Both the 90° and 0° groups' maximum stress values were determined with the cross-sectional area acquired by manual measurements. As a result, the cross-sectional areas were not accurate enough because of the previously mentioned resulting kerf angle left on the specimen. To verify the hypothesis, the specimens underwent high-precision measurements, and the cross-sectional area was corrected. There was relatively no difference in the edge surface finish and the amount of stress the specimens could withstand. This could be the result of the small thickness values of the composite specimens. Since the specimens were so thin, there was not enough material to alter the edge surface finish to the point where stress concentrations could form. Further research must be conducted to fully analyze and verify the previously mentioned hypothesis. In conclusion, when using fiber reinforced composite test specimens for tensile testing, it is recommended to use another means of cutting the samples. The kerf angle itself alters the test specimens enough to the point where the cross-sectional measurements are too inaccurate when following the ASTM 3039 guidelines.

continued on page 31...

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



ACCE Award Winning Paper continued...

Bibliography

1. Erden, S. & Ho, K. Fiber Technology for Fiber-Reinforced Composites. Woodhead Publishing Series in Composites Science and Engineering; 2017. pp. 51-79.
2. Beetle Plastic. FRP Has a High Strength to Weight Ratio. 2014.
3. Riadh A & Kalfat R. Rehabilitation of concrete structures with fiber-reinforced polymer. Butterworth-Heinemann; 2018.
4. Slayton R & Spinardi G. Radical Innovation in Scaling Up: Boeing's Dreamliner and the challenge of socio-technical transitions. Technovation; 2015 August 4.
5. Giurgiutiu V. Stress, Vibration, and Wave Analysis in Aerospace Composites. Academic Press. 2022; pp. 1-27.
6. Pulidini K & Prakash A. Aerospace Composites Market Size – By Fiber (Glass, Carbon/Graphite, Ceramic, and Aramid), By Resin (Thermosetting [Epoxy, Phenolics, Polyester, Polyimide.], Thermoplastic [Polyether Ether Ketone, Polysulfone, Polyetherimide]), Aircraft, Application & Forecast. 2021 September.
7. Pulidini K & Prakash A. Aerospace Composites Market Size – By Fiber (Glass, Carbon/Graphite, Ceramic, and Aramid), By Resin (Thermosetting [Epoxy, Phenolics, Polyester, Polyimide.], Thermoplastic [Polyether Ether Ketone, Polysulfone, Polyetherimide]), Aircraft, Application & Forecast. 2021 September.
8. Teti, R. Machining of Composite Materials. CIRP Annals. 2002; pp. 611-634.
9. S. Abrate & D. Walton. Machining of composite materials. Part II: Non-Traditional Methods. Composites Machining. 1992; pp. 85-94.
10. B.F. Sorensen. Delamination fractures in composite materials. Woodhead Publishing Series in Composite Science and Engineering, Modeling Damage, Fatigue and Failure of Composite Materials. 2016; pp. 213-240.
11. Folkes, J. Waterjet – An innovative tool for manufacturing. Journal of Materials Processing Technology. 2009; p. 6181-6189.
12. Schlick, J. Water Jet Cutting For Composite Materials: Types, Applications & Benefits. Techni-Waterjet. 2023 June 12.
13. ManufacturingGeneral. What are the Benefits of Using Waterjet Technology for Precision Cutting. Manufacturing Solutions. 2021 February 12.
14. Wang, H., Sun, J., Zhang, D., Guo, K., & Li, J. The effect of cutting temperature in milling of carbon fiber reinforced polymer composites. Applied Science and Manufacturing. 2016; Vol. 91, Pt. 2, pp. 380-387.
15. Diversified Metal Services INC. Waterjet Cutting. 2023.
16. Sheikh-Ahmed, J., Tool wear in machining processes for composites. Composite Science and Engineering, Machining Technology for Composite Material. 2012; pp. 116-153.
17. Xu, J. A review on tool wear issues in drilling CFRP laminates. Frontiers in Materials. 2022; Vo. 9.
18. Universal Laser Systems. Composites: ULS Advantages. 2023.
19. Team Xometry. Advantages and Disadvantages of Laser Cutting, 2022 November 18.
20. Vigneshwaran, S., John, K., Deepak Joel Johnson R., Uthayakumar, M., Arumugaprabu, & V. Kumaran, ST. Conventional and unconventional machining performance of natural fibre-reinforced polymer composites: A review. Journal of Plastics and Composites. 2021; 40(15-16):553-567.
21. Zheng, H.Y., Han, Z.Z., Chen, Z.D., Chen, W.L., & Yeo, S. Quality and cost comparisons between laser and waterjet cutting. Journal of Materials Processing Technology. 1996; Vo. 62, pp. 294-298
22. Li, M., Xiangchen, L., Xujing, Y., Hao, W., & Xianming, M. Study of kerf characteristics and surface integrity based on physical model during abrasive waterjet cutting of thick CFRP laminates. The International Journal of Advanced Manufacturing Technology. 2021 March.
23. Ojmertz, C. Kerf Definition – Width, Waterjet Kerf Angle. Finepart Academy, Waterjet Cutter. 2022 March 22.
24. Shanmugan, D.K. & Masood, S.H. An investigation on kerf characteristics in abrasive waterjet cutting of layered composites. Journal of Materials Processing Technology. 2009; Vo. 209, pp. 3887-3893.
25. Whang S., Zhang, Y., & Yang, F. A key parameter to characterize the kerf profile error generated by abrasive water-jet. The International Journal of Advanced Manufacturing Technology. 2016 September 20; pp. 1265-1275.
26. Kim, G., Denos, B., & Sterkenburg R. Influence of piercing methods of abrasive waterjet on delamination of fiber reinforced composite laminate. Composite Structures. 2020 May 15; Vo. 240.

This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings

Board of Directors

SPONSOR LINKS




Oleksandr G. Kravchenko, Ph.D.
SPE Composites Director, Chair, & Associate Professor, Dept. of Mechanical and Aerospace Engineering, Old Dominion University, Norfolk, VA
okravche@odu.edu



John P. Busel, F. ACI
SPE Composites Director, Past Chair & Intersociety Chair, V.P. Composites Growth Initiative, American Composites Manufacturers Association, Arlington, VA
jbusel@acmanet.org



Mingfu Zhang, Ph.D.
SPE Composites Director, and Treasurer, Johns Manville, Sr. Research Manager, Corporate R&D, Littleton, CO
mingfu.zhang@jm.com



Christoph Kuhn, Ph.D.
SPE Composites Director, and Secretary, Volkswagen Group of America, Inc., North American Engineering & Planning Center, Chattanooga, TN
christoph.kuhn@vw.com



Dale Brosius
SPE Composites Director, and Councilor, Chief Commercialization Officer, IACMI, Knoxville, TN
dbrosius@iacmi.org



Daniel T. Buckley
SPE Composites Director, (Retired), Emeritus Director, Falmouth, MA
dbuck@vermontel.net



Rich Caruso
SPE Composites Director, CEO Inter/Comp LLC, Falmouth, MA
rpcaruso@gmail.com



Michael Connolly, Ph.D.
SPE Composites Director, (Retired), Ypsilanti, MI, Consultant, MC Material Design, mcmaterialdesign.com



Pritam Das
SPE Composites Director, Newsletter and Director of Technical Engineering, Toray Composites Materials America (CMA), Tacoma, WA
Pritam.das@toraycma.com



Frederick S. Deans
SPE Composites Director, Principal, Allied Composite Technologies, LLC, Rochester Hills, MI
fdeans@alliedcomptech.com



Hicham Ghossein, Ph.D.
SPE Composites Director, President & Founder of Endeavor Composites, Inc., Knoxville, TN
hghossein@endeavorcomposites.com



Jack Gillespie, Ph.D.
SPE Composites Director, Director, Center for Composite Materials, Donald C. Phillips Professor of Civil and Environmental Engineering, University of Delaware, Newark, DE
gillespi@udel.edu

Board of Directors continued...




Enamul Haque, Ph.D.
SPE Composites Director,
A2H Consulting Group
Enamul.Haque@
a2hconsultinggroup.com



Vipin Kumar, Ph.D.
SPE Composites director,
R&D Staff Member,
Manufacturing Science
Division,
Oak Ridge National
Laboratory, Knoxville, TN
kumarvi@ornl.gov



Antoine Rios, Ph.D.
SPE Composites Director,
Finance Chair,
The Madison Group
Madison, WI
Antoine@madisongroup.
com



Ian Swentek, Ph.D.
SPE Composites Director,
Applications Development
Engineer Hexion
London, ON, Canada
Ian.Swentek@hexion.com



Uday Vaidya, Ph.D.
SPE Composites Director,
and Education Chair
Professor in Mechanical,
Aerospace & Biomedical
Engineering
Chief Technology Officer
(CTO), IACMI
University of Tennessee
Knoxville, TN
uvaidya@utk.edu



Pritesh Yeole, Ph.D.
SPE Composites Director,
and Award Chair
Research Associate in
Advanced Composites
Manufacturing
Fibers and Composites
Manufacturing Facility
University of Tennessee
Knoxville, TN
pyeole@vols.utk.edu



This Issue:

- Message from the Chair
- Membership Report
- Welcome Vipin Kumar
- ACCE Best Paper Finalists
- ACCE Call for Papers
- ACCE Keynote Announced
- ACCE Call for Abstracts
- Award Report
- Award Winning Paper
- BOD Listings



Sponsor the Newsletter

The best advertising value in the Composites Industry

- Support your SPE Composites Division
- Reach 1,000 Composites Professionals
3 Times a year via the E-Newsletter
- Maximize your exposure to the
customers & the trade



Contact Teri Chouinard CBC, APR for more info intuitgroup@gmail.com
See page 18 for more details